TS16MLD64V6D5

184PIN DDR266 Unbuffered DIMM
128MB With 16Mx8 CL2.5

Description

The TS16MLD64V6D5 is a 16M x 64bits Double Data Rate SDRAM high density for DDR266. The TS16MLD64V6D5 consists of 8pcs CMOS 16Mx8 bits Double Data Rate SDRAMs in 66 pin TSOP-II 400mil packages and a 2048 bits serial EEPROM on a 184-pin printed circuit board. The TS16MLD64V6D5 is a Dual In-Line Memory Module and is intended for mounting into 184-pin edge connector sockets.

Synchronous design allows precise cycle control with the use of system clock. Data I/O transactions are possible on both edges of DQS. Range of operation frequencies, programmable latencies allow the same device to be useful for a variety of high bandwidth, high performance memory system applications.

Features

- Power supply: VDD: 2.5V ± 0.2V, VDDQ: 2.5V ± 0.2V
- Max clock Freq: 133MHZ.
- Double-data-rate architecture; two data transfers per clock cycle
- Differential clock inputs (CK and /CK)
- DLL aligns DQ and DQS transition with CK transition
- Auto and Self Refresh 15.6us refresh interval.
- Data I/O transactions on both edge of data strobe.
- Edge aligned data output, center aligned data input.
- Serial Presence Detect (SPD) with serial EEPROM
- SSTL-2 compatible inputs and outputs.
- MRS cycle with address key programs.
  - CAS Latency (Access from column address) : 2.5
  - Burst Length (2,4,8)
  - Data Sequence (Sequential & Interleave)

Placement

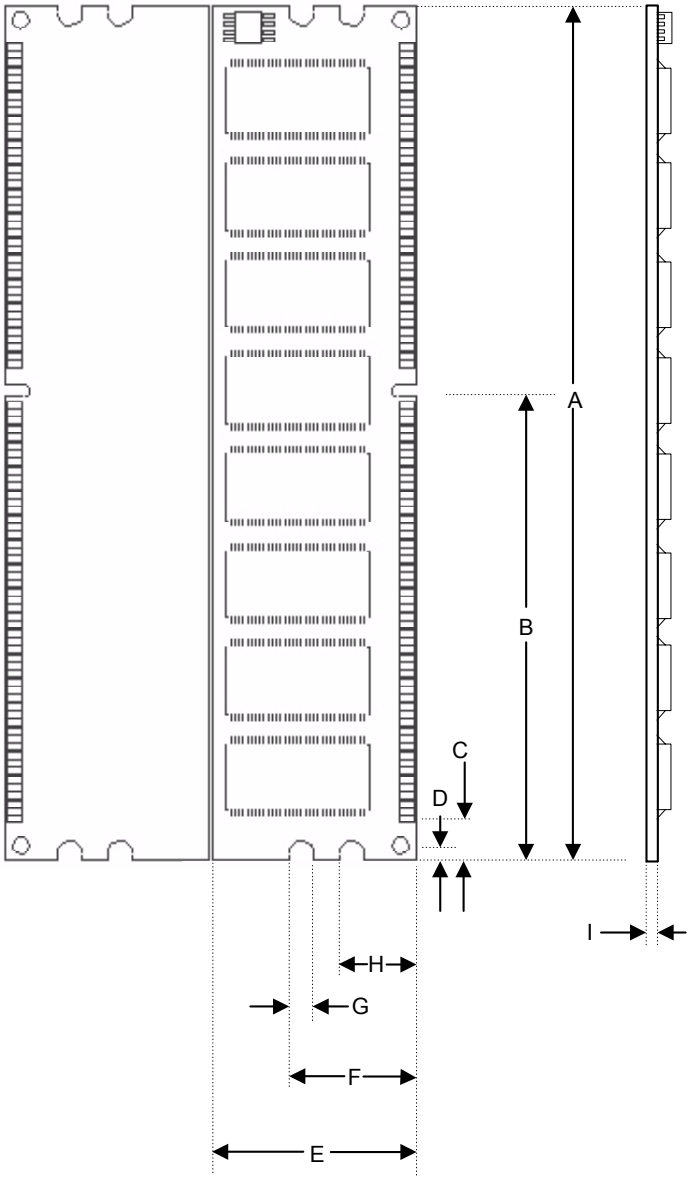

PCB: 09-1395

Dimensions

Side	Millimeters	Inches
A	133.35±0.20	5.250±0.008
B	72.39	2.850
C	6.35	0.250
D	2.20	0.087
E	31.75±0.20	1.250±0.008
F	19.80	0.779
G	4.00	0.157
H	12.00	0.472
I	1.27±0.10	0.050±0.004

(Refer Placement)

Pin Identification

Symbol	Function
A0~A11, BA0, BA1	Address input
DQ0~DQ63	Data Input / Output.
DQS0~DQS7	Data strobe input/output
CK0, /CK0, CK1, /CK1 CK2, /CK2	Clock Input.
CKE0	Clock Enable Input.
/CS0	Chip Select Input.
/RAS	Row Address Strobe
/CAS	Column Address Strobe
/WE	Write Enable
DM0~DM7	Data-in Mask
VDD	+2.5 Voltage power supply
VDDQ	+2.5 Voltage Power Supply for DQS
VREF	Power Supply for Reference
VDDSPD	+2.5 Voltage Serial EEPROM Power Supply
SA0~SA2	Address in EEPROM
SCL	Serial PD Clock
SDA	Serial PD Add/Data input/output
VSS	Ground
NC	No Connection

Pinouts:

Pin No	Pin Name	Pin No	Pin Name	Pin No	Pin Name	Pin No	Pin Name
01	VREF	47	*DQS8	93	VSS	139	VSS
02	DQ0	48	A0	94	DQ4	140	*DM8
03	VSS	49	*CB2	95	DQ5	141	A10
04	DQ1	50	VSS	96	VDDQ	142	*CB6
05	DQS0	51	*CB3	97	DM0	143	VDDQ
06	DQ2	52	BA1	98	DQ6	144	*CB7
07	VDD	53	DQ32	99	DQ7	145	VSS
08	DQ3	54	VDDQ	100	VSS	146	DQ36
09	NC	55	DQ33	101	NC	147	DQ37
10	NC	56	DQS4	102	NC	148	VDD
11	VSS	57	DQ34	103	NC	149	DM4
12	DQ8	58	VSS	104	VDDQ	150	DQ38
13	DQ9	59	BA0	105	DQ12	151	DQ39
14	DQS1	60	DQ35	106	DQ13	152	VSS
15	VDDQ	61	DQ40	107	DM1	153	DQ44
16	*CK1	62	VDDQ	108	VDD	154	/RAS
17	*/CK1	63	/WE	109	DQ14	155	DQ45
18	VSS	64	DQ41	110	DQ15	156	VDDQ
19	DQ10	65	/CAS	111	*CKE1	157	/CS0
20	DQ11	66	VSS	112	VDDQ	158	*/CS1
21	CKE0	67	DQS5	113	NC	159	DM5
22	VDDQ	68	DQ42	114	DQ20	160	VSS
23	DQ16	69	DQ43	115	*A12	161	DQ46
24	DQ17	70	VDD	116	VSS	162	DQ47
25	DQS2	71	NC	117	DQ21	163	NC
26	VSS	72	DQ48	118	A11	164	VDDQ
27	A9	73	DQ49	119	DM2	165	DQ52
28	DQ18	74	VSS	120	VDD	166	DQ53
29	A7	75	*/CK2	121	DQ22	167	NC
30	VDDQ	76	*CK2	122	A8	168	VDD
31	DQ19	77	VDDQ	123	DQ23	169	DM6
32	A5	78	DQS6	124	VSS	170	DQ54
33	DQ24	79	DQ50	125	A6	171	DQ55
34	VSS	80	DQ51	126	DQ28	172	VDDQ
35	DQ25	81	VSS	127	DQ29	173	NC
36	DQS3	82	NC	128	VDDQ	174	DQ60
37	A4	83	DQ56	129	DM3	175	DQ61
38	VDD	84	DQ57	130	A3	176	VSS
39	DQ26	85	VDD	131	DQ30	177	DM7
40	DQ27	86	DQS7	132	VSS	178	DQ62
41	A2	87	DQ58	133	DQ31	179	DQ63
42	VSS	88	DQ59	134	*CB4	180	VDDQ
43	A1	89	VSS	135	*CB5	181	SA0
44	*CB0	90	NC	136	VDDQ	182	SA1
45	*CB1	91	SDA	137	CK0	183	SA2
46	VDD	92	SCL	138	/CK0	184	VDDSPD

* Please refer Block Diagram

Block Diagram

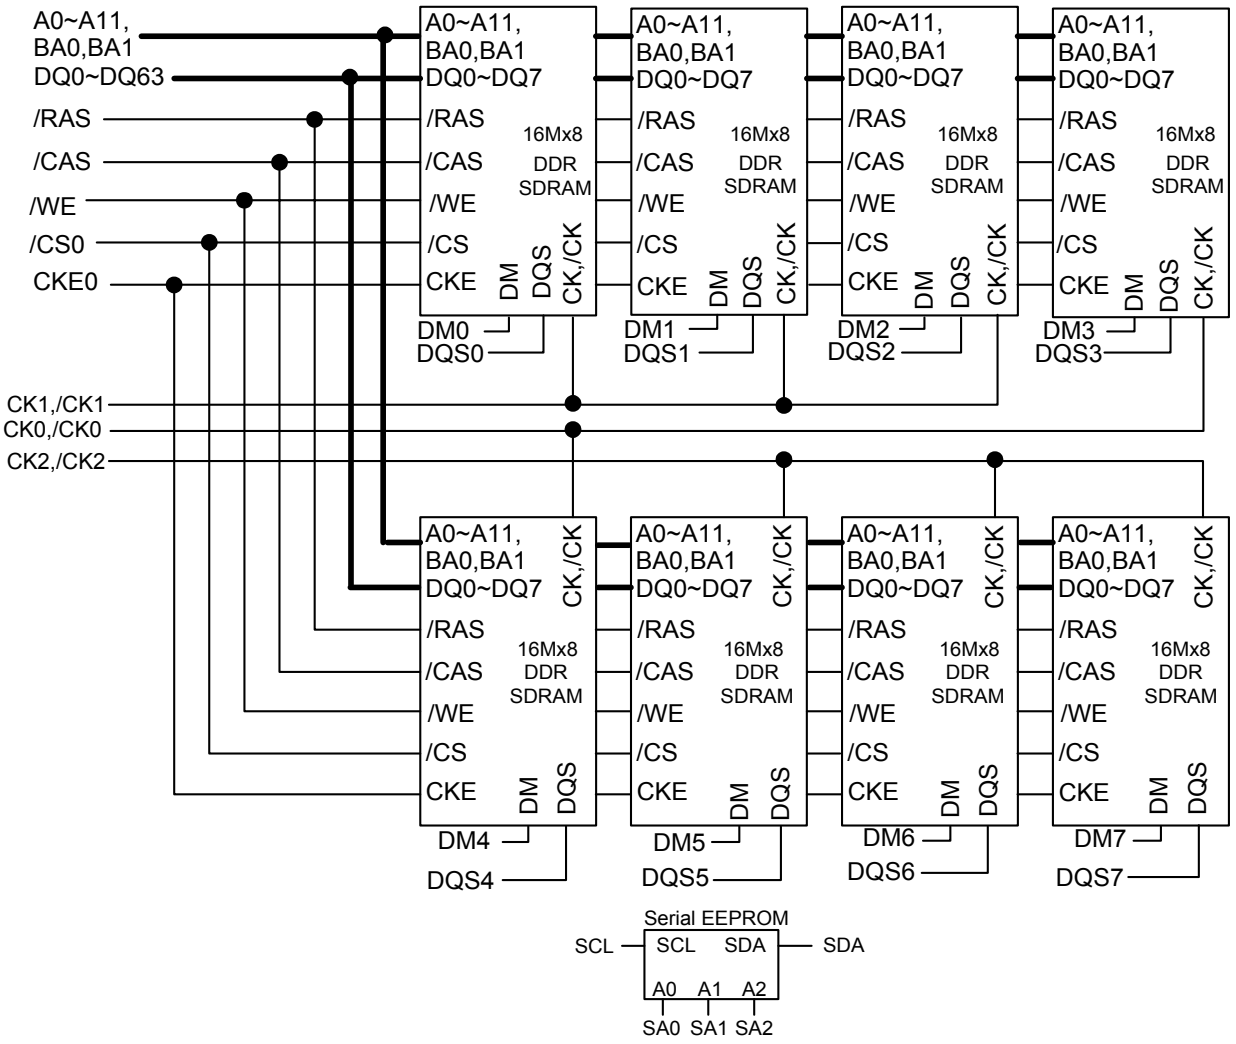

This technical information is based on industry standard data and tests believed to be reliable. However, Transcend makes no warranties, either expressed or implied, as to its accuracy and assume no liability in connection with the use of this product. Transcend reserves the right to make changes in specifications at any time without prior notice.

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Voltage on any pin relative to Vss	VIN, VOUT	-0.5 ~ 3.6	V
Voltage on V_{DD} supply to Vss	VDD, VDDQ	-1.0 ~ 3.6	V
Storage temperature	T_{STG}	-55~+150	°C
Power dissipation	P_D	12	W
Short circuit current	I_{OS}	50	mA
Mean time between failure	MTBF	50	year
Temperature Humidity Burning	THB	85°C/85%, Static Stress	°C-%
Temperature Cycling Test	TC	0°C ~ 125°C Cycling	°C

Note: Permanent device damage may occur if ABSOLUTE MAXIMUM RATINGS are exceeded.
Functional operation should be restricted to recommended operating condition.
Exposure to higher than recommended voltage for extended periods of time could affect device reliability.

DC OPERATING CONDITIONS

Recommended operating conditions (Voltage referenced to Vss = 0V, T_A = 0 to 70°C)

Parameter	Symbol	Min	Max	Unit	Note
Supply voltage	VDD	2.3	2.7	V	
I/O Supply voltage	VDDQ	2.3	2.7	V	
I/O Reference voltage	VREF	V_{DDQ}/2-50mV	V_{DDQ}/2+50mV	V	1
I/O Termination voltage	VTT	V_{REF}-0.04	V_{REF}+0.04	V	2
Input logic high voltage	VIH(DC)	V_{REF}+0.15	V_{DDQ}+0.3	V	4
Input logic low voltage	VIL(DC)	-0.3	V_{REF}-0.15	V	4
Input Voltage Level, CK and /CK inputs	VIN(DC)	-0.3	V_{DDQ}+0.3	V	
Input Differential Voltage, CK and /CK inputs	VID(DC)	0.3	V_{DDQ}+0.6	V	3
Input crossing point voltage, CK and /CK inputs	VIX(DC)	1.15	1.35	V	5
Input leakage current	I_I	-2	2	uA	
Output leakage current	I_{OZ}	-5	5	uA	
Output High Current (Normal strength driver) VOUT= VTT + 0.84V	I_{OH}	-16.8		mA	
Output Low Current (Normal strength driver) VOUT= VTT – 0.84V	I_{OL}	16.8		mA	
Output High Current (Half strength driver) VOUT= VTT + 0.45V	I_{OH}	-9		mA	
Output High Current (Half strength driver) VOUT= VTT - 0.45V	I_{OL}	9		mA	

Note:
1. Includes ± 25mV margin for DC offset on VREF, and a combined total of ± 50mV margin for all AC noise and DC offset on VREF, bandwidth limited to 20MHz. The DRAM must accommodate DRAM current spikes on VREF and internal DRAM noise coupled. TO VREF, both of which may result in VREF noise. VREF should be de-coupled with an inductance of <=3nH.
2. V_{TT} is not applied directly to the device. V_{TT} is a system supply for signal termination resistors, is expected to be set equal to VREF, and must track variations in the DC level of VREF
3. V_{ID} is the magnitude of the difference between the input level on CK and the input level on /CK.
4. These parameters should be tested at the pin on actual components and may be checked at either the pin or the pad in simulation. The AC and DC input specifications are relative to a VREF envelop that has been bandwidth limited to 200MHZ.
5. The value of V_{IX} is expected to equal 0.5*VDDQ of the transmitting device and must track variations in the dc level of the same.

DC CHARACTERISTICS

(Recommended operating condition unless otherwise noted, VDD=2.7V, TA = 10 °C)

Parameter	Symbol	Max.	Unit	Note
Operating current - One bank Active-Precharge; tRC=tRCmin; tCK=133MHZ for DDR266 DQ, DM and DQS inputs changing twice per clock cycle; Address and control inputs changing once per clock cycle	IDD0	760	mA	
Operating current - One bank operation; One bank open, Burst=4; Reads - Refer to the following page for detailed test condition.	IDD1	960	mA	
Percharge power-down standby current; All banks idle; power –down mode; CKE = <VIL(max); tCK=133MHZ for DDR266, VIN = VREF for DQ,DQS and DM	IDD2P	24	mA	
Precharge Floating standby current; CS# > =VIH(min);All banks idle; CKE > = VIH(min); tCK=133MHZ for DDR266, Address and other control inputs changing once per clock cycle; VIN = VREF for DQ,DQS and DM	IDD2F	176	mA	
Precharge Quiet Standby current; CS#>=VIH (min); All banks idle; CKE>=VIH(min); tCK=133MHZ for DDR266; Address and other control inputs stable with keeping >=VIH(min) or =< VIL(max); VIN=VREF for DQ,DQS and DM	IDD2Q	120		
Active power - down standby current; one bank active; power-down mode; CKE<= VIL (max); tCK=133MHZ for DDR266; VIN = VREF for DQ,DQS and DM	IDD3P	280	mA	
Active standby current; CS# >= VIH(min); CKE>=VIH(min); one bank active; active - precharge; tRC=tRASmax; tCK=133MHZ for DDR266; DQ, DQS and DM inputs changing twice per clock cycle; Address and other control inputs changing once per clock cycle	IDD3N	440	mA	
Operating current - burst read; Burst length = 2; reads; continuous burst; One bank active; address and control inputs changing once per clock cycle; 50% of data changing at every burst; Iout = 0 mA	IDD4R	1136	mA	
Operating current - burst write; Burst length = 2; writes; continuous burst; One bank active address and control inputs changing once per clock cycle; CL=2.5 at tCK=133MHZ for DDR266; DQ, DM and DQS inputs changing twice per clock cycle, 50% of input data changing at every burst	IDD4W	1040	mA	
Auto refresh current; tRC = tRFC(min), 10*tCK for DDR266at 133Mhz; distributed refresh	IDD5	1480	mA	
Self refresh current; CKE <= 0.2V; External clock should be on; tCK=133MHZ for DDR266;	IDD6	16	mA	
Operating current - Four bank operation; Four bank interleaving with BL=4 -Refer to the following page for detailed test condition	IDD7	2400	mA	

Note: 1. Module I_{DD} was calculated on the basis of component I_{DD} and can be differently measured according to DQ loading capacitor.

AC OPERATING CONDITIONS

Parameter	Symbol	Min	Max	Unit	Note
Input High (Logic 1) Voltage, DQ, DQS and DM signals	VIH(AC)	VREF + 0.31		V	3
Input Low (Logic 0) Voltage, DQ, DQS and DM signals	VIL(AC)		VREF - 0.31	V	3
Input Differential Voltage, CK and /CK inputs	VID(AC)	0.7	VDDQ + 0.6	V	1
Input Crossing Point Voltage, CK and /CK inputs	VIX(AC)	0.5*VDDQ - 0.2	0.5*VDDQ + 0.2	V	2

Note:
1. VID is the magnitude of the difference between the input level on CK and the input on /CK.
2. The value of VIX is expected to equal 0.5*V DDQ of the transmitting device and must track variations in the DC level of the same.
3. These parameters should be tested at the pin on actual components and may be checked at either the pin or the pad in simulation. The AC and DC input specifications are relative to a VREF envelope that has been bandwidth limited 20MHz.

AC OPERATING TEST CONDITIONS (VDD=2.5, VDDQ=2.5, TA=0 to 70°C)

Parameter	Value	Unit	Note
Input reference voltage for Clock	0.5*VDDQ	V	
Input signal maximum peak swing	1.5	V	
Input Levels(VIH/VIL)	VREF+0.31/VREF-0.31	V	
Input timing measurement reference level	VREF	V	
Output timing measurement reference level	VTT	V	
Output load condition	See Load Circuit		

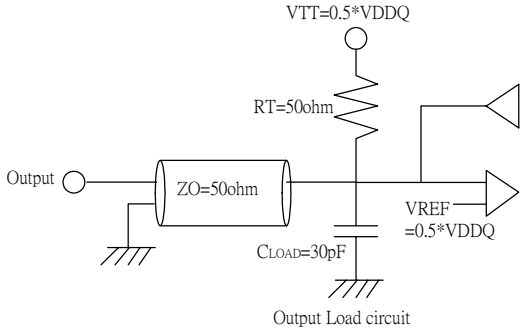

Output Load circuit

Input/Output CAPACITANCE (VDD = 2.5V, VDDQ = 2.5V,TA = 25°C, f = 1MHz)

Parameter	Symbol	Min	Max	Unit
Input capacitance (A0~A11, BA0~BA1, /RAS, /CAS, /WE)	CIN1	49	57	pF
Input capacitance (CKE0)	CIN2	42	50	pF
Input capacitance (/CS0)	CIN3	42	50	pF
Input capacitance (CK0 ~ CK2)	CIN4	22	25	pF
Input capacitance (DM0~DM7)	CIN5	6	8	pF
Data and DQS input/output capacitance (DQ0~DQ63)	COUT1	6	8	pF

AC Timing Parameters & Specifications

(These AC characteristics were tested on the Component)

Parameter	Symbol	Min	Max	Unit	Note
Row cycle time	tRC	65		ns	
Refresh row cycle time	tRFC	75		ns	
Row active time	tRAS	45	120K	ns	
/RAS to /CAS delay	tRCD	20		ns	
Row active to Row active delay	tRP	20		ns	
Row active to Row active delay	tRRD	15		ns	
Write recovery time	tWR	15		ns	
Last data in to Read command	tWTR	1		tCK	
Col. Address to Col. Address delay	tCCD	1		tCK	
Clock cycle time	tCK	7.5		ns	
Clock high level width	tCH	0.45	0.55	tCK	
Clock low level width	tCL	0.45	0.55	tCK	
DQS-out access time from CK /CK	tDQSCK	-0.75	0.75	ns	
Output data access time from CK /CK	tAC	-0.75	0.75	ns	
Data strobe edge to output data edge	tDQSQ		0.5	ns	
Read Preamble	tRPRE	0.9	1.1	tCK	
Read Postamble	tRPST	0.4	0.6	tCK	
CK to valid DQS-in	tDQSS	0.75	1.25	tCK	
DQS-in setup time	tWPRES	0		ns	2
DQS-in hold time	tWPREH	0.25		tCK	
DQS falling edge to CK rising-setup time	tDSS	0.2		tCK	
DQS falling edge from CK rising-hold time	tDSH	0.2		tCK	
DQS-in high level width	tDQSH	0.35		tCK	
DQS-in low level width	tDQSL	0.35		tCK	
DQS-in cycle time	tDSC	0.9	1.1	tCK	
Address and Control input setup time	tIS	0.9		ns	
Address and Control input hold time	tIH	0.9		ns	
Data-out high-impedance time from CK, /CK	tHZ	tACmin-400ps	tACman-400ps	ns	
Data-out low-impedance time from CK, /CK	tLZ	tACmin-400ps	tACman-400ps	ns	
Mode register set cycle time	tMRD	15		ns	
DQ & DM setup time to DQS	tDS	0.5		ns	
DQ & DM hold time to DQS	tDH	0.5		ns	
DQ & DM input pulse width	tDIPW	1.75		ns	
Power down exit time	tPDEX	7.5		ns	
Exit self refresh to write command	tXSW			ns	
Exit self refresh to bank active command	tXSA	75		ns	
Exit self refresh to read command	tXSR	200		tCK	
Refresh interval time	tREF	15.6		us	1
Clock half period	tHP	tCLmin or tCHmin		ns	
Data hold skew factor	tQHS		0.75	ns	
DQS write postamble time	tWPST	0.4	0.6	tCK	3

Note:
1. Maximum burst refresh of 8
2. The specific requirement is that DQS be valid (High or Low) on or before this CK edge. The case shown (DQS going from High_Z to logic Low) applies when no writes were previously in progress on the bus. If a previous write was in progress, DQS could be High at this time, depending on tDQSS.
3. The Maximum limit for this parameter is not a device limit. The device will operate with a great value for this parameter, but system performance (bus turnaround) will degrade accordingly.

SIMPLIFIED TRUTH TABLE

(V=Valid, X=Don't Care, H=Logic High, L=Logic Low)

COMMAND			CKEn-1	CKEn	/CS	/RAS	/CAS	/WE	$BA_{0,1}$	A_{10}/AP	A_0~A_9, A_{11}	Note
Register	Extended Mode Register Set		H	X	L	L	L	L	OP CODE			1,2
Register	Mode Register Set		H	X	L	L	L	L	OP CODE			1,2
Refresh	Auto Refresh		H	H	L	L	L	H	X			3
	Self Refresh	Entry		L								3
		Exit	L	H	L	H	H	H	X			3
					H	X	X	X				3
Bank Active & Row Addr.			H	X	L	L	H	H	V	Row Address		
Read & Column Address	Auto Precharge Disable		H	X	L	H	L	H	V	L	Column Address (A_0~A_9)	4
	Auto Precharge Enable									H		4
Write & Column Address	Auto Precharge Disable		H	X	L	H	L	L	V	L	Column Address (A_0~A_9)	4
	Auto Precharge Enable									H		4, 6
Burst Stop			H	X	L	H	H	L	X			7
Precharge	Bank Selection		H	X	L	L	H	L	V	L	X	
	All Banks								X	H		5
Active Power Down	Entry		H	L	H	X	X	X	X			
					L	V	V	V				
	Exit		L	H	X	X	X	X				
Precharge Power Down Mode	Entry		H	L	H	X	X	X	X			
					L	H	H	H				
	Exit		L	H	H	X	X	X				
					L	V	V	V				
DM			H	X					X			8
No Operation Command			H	X	H	X	X	X	X			9
					L	H	H	H				9

Note:
1. OP Code: Operand Code. A0 ~ A11 & BA0 ~ BA1: Program keys. (@EMRS/MRS)
2. EMRS/ MRS can be issued only at all banks precharge state. A new command can be issued 2 clock cycles after EMRS or MRS.
3. Auto refresh functions are same as the CBR refresh of DRAM. The automatic precharge without row precharge command is meant by "Auto". Auto/self refresh can be issued only at all banks precharge state.
4. BA0 ~ BA1: Bank select addresses. If both BA0 and BA1 are "Low" at read, write, row active and precharge, bank A is selected. If both BA0 is "High" and BA1 is "Low" at read, write, row active and precharge, bank B is selected. If both BA0 is "Low" and BA1 is "High" at read, write, row active and precharge, bank C is selected. If both BA0 and BA1 are "High" at read, write, row active and precharge, bank D is selected.
5. If A10/AP is "High" at row precharge, BA0 and BA1 are ignored and all banks are selected.
6. During burst write with auto precharge, new read/write command cannot be issued. Another bank read/write command can be issued after the end of burst. New row active of the associated bank can be issued at tRP after the end of burst.
7. Burst stop command is valid at every burst length.
8. DM sampled at the rising and falling edges of the DQS and Data-in is masked at the both edges (Write DM latency is 0).
9. This combination is not defined for any function, which means "No Operation (NOP)" in DDR SDRAM.

Serial Presence Detect Specification

Serial Presence Detect			
Byte No.	Function Described	Standard Specification	Vendor Part
0	# of Bytes Written into Serial Memory	128bytes	80
1	Total # of Bytes of S.P.D Memory	256bytes	08
2	Fundamental Memory Type	DDR SDRAM	07
3	# of Row Addresses on this Assembly	12	0C
4	# of Column Addresses on this Assembly	10	0A
5	# of Module Rows on this Assembly	1 bank	01
6	Data Width of this Assembly	64bits	40
7	Data Width of this Assembly	-	00
8	VDDQ and Interface Standard of this Assembly	SSTL 2.5V	04
9	DDR SDRAM Cycle Time at CAS Latency=2.5	7.5ns	75
10	DDR SDRAM Access Time from Clock at CL=2.5	±0.75ns	75
11	DIMM configuration type (non-parity, Parity, ECC)	NON-ECC	00
12	Refresh Rate Type	15.625us/Self Refresh	80
13	Primary DDR SDRAM Width	X8	08
14	Error Checking DDR SDRAM Width	-	00
15	Min Clock Delay for Back to Back Random Column Address	tCCD=1CLK	01
16	Burst Lengths Supported	2,4,8	0E
17	# of banks on each DDR SDRAM device	4 bank	04
18	CAS Latency supported	2, 2.5	0C
19	CS Latency	0 CLK	01
20	WE Latency	1 CLK	02
21	DDR SDRAM Module Attributes	Registered address & control inputs and on-card DLL	20
22	DDR SDRAM Device Attributes : General	+/-0.2V voltage tolerance	00
23	DDR SDRAM Cycle Time CL=2.0	10ns	A0
24	DDR SDRAM Access from Clock CL=2.0	±0.75ns	75
25	DDR SDRAM Cycle Time CL=1.5	-	00
26	DDR SDRAM Access from Clock CL=1.5	-	00
27	Minimum Row Precharge Time (tRP)	20ns	50
28	Minimum Row Active to Row Activate delay (tRRD)	15ns	3C
29	Minimum RAS to CAS Delay (tRCD)	20ns	50
30	Minimum active to Precharge time (tRAS)	45ns	2D
31	Module ROW density	128MB	20
32	Command/Address Input Setup Time	0.9ns	90
33	Command/Address Input Hold Time	0.9ns	90
34	Data Signal Input Setup Time	0.5ns	50
35	Data Signal Input Hold Time	0.5ns	50
36-61	Superset Information	-	00
62	SPD Data Revision Code	-	00
63	Checksum for Bytes 0-62	-	9C

64-71	Manufacturers JEDEC ID	Transcend	7F, 4F					
72	Manufacturing Location	T	54					
73-90	Manufacturers Part Number	TS16MLD64V6D5	54	53	31	36	4D	4C
			44	36	34	56	36	44
			35	20	20	20	20	20
91-92	Revision Code	-	-					
93-94	Manufacturing Date	By Manufacturer	Variable					
95-98	Assembly Serial Number	By Manufacturer	Variable					
99-127	Manufacturer Specific Data	-	-					
128~255	Unused Storage Locations	Undefined	-					